

# SPECIAL PACKAGING INSTRUCTION

Form Approved  
OMB No. 0704-0188

-CL

The public reporting burden for this collection of information is estimated to average 30 days per response, including the time for reviewing instructions, searching existing data sources, gathering and maintaining the data needed, and completing and reviewing the collection of information. Send comments regarding this burden estimate or any other aspect of this collection of information, including suggestions for reducing this burden, to Department of Defense, Washington Headquarters Services, Directorate for Information Operations and Reports (0704-0188), 1215 Jefferson Davis Highway, Suite 1204, Arlington, VA 22202-4302. Respondents should be aware that notwithstanding any other provision of law, no person shall be subject to any penalty for failing to comply with a collection of information if it does not display a currently valid OMB control number. **PLEASE DO NOT RETURN YOUR FORM TO THIS ADDRESS**

1. PART OR DRAWING NO. (CAGE) NOMENCLATURE 7500-453 (6N039) BEAM ASSEMBLY, EQUALIZER			2. CODE IDENT 19207		3. SPI NO. AK12084540	
4. NATIONAL STOCK NUMBER 2590-01-208-4540			5. DATE OF DRAWING 6/02/2010		6. REVISION B	
7. QUP 1 EA.	8. ICQ NONE	9. UNIT PACK WT. (LB) 430.0	10. UNIT PACK CU (CU FT) 8.526		11. UNIT PACK SIZE (INCHES) 71.0 X 16.6 X 12.5	
12. MILITARY PRESERVATION (METHOD) MIL-STD-2073-1D, METHOD 20		18. STEPS 1-B	19. REQ'D	20. DESCRIPTION PRESERVATIVE: MIL-PRF-16173, GR 4		
13. CLEANING MIL-STD-2073-1D, C-1		2-C		BLOCKING/BRACING: ASTM-D 6199		
14. DRYING MIL-STD-2073-1D		3-D		WRAP: MIL-PRF-121 TY II, GR A CL 1		
15. PACKING		4-E	1	CONTAINER: ASTM-D 6880ST 1, CL 2, (MODIFIED)		
a. LEVEL A MIL-STD-2073-1D AND NOTE F				SIZE: 68 X 15 X 8		
b. LEVEL B NOT APPLICABLE						
16. MARKING MIL-STD-129						

## 17. NOTES / DRAWING

- A. PRESERVATION AND PACKING SHALL BE IN ACCORDANCE WITH MIL-STD-2073-1D.
- B. APPLY PRESERVATIVE TO UNPAINTED, UNPLATED EXTERIOR METALLIC SURFACES.
- C. FOR FABRICATION AND PLACEMENT OF BLOCKING AND BRACING, SEE PAGE 2.
- D. APPLY WRAP BETWEEN POINTS OF CONTACT OF ITEM WITH BLOCKING OR CONTAINER.
- E. CONTAINER IS CONSTRUCTED USING 1" NOMINAL LUMBER WITH 2" NOMINAL ENDS AND NO END CLEATS REQUIRED.
- F. THE SHIPPING CONTAINER IS THE UNIT CONTAINER.

# SPECIAL PACKAGING INSTRUCTION

Form Approved  
OMB No. 0704-0188

-CL

The public reporting burden for this collection of information is estimated to average 30 days per response, including the time for reviewing instructions, searching existing data sources, gathering and maintaining the data needed, and completing and reviewing the collection of information. Send comments regarding this burden estimate or any other aspect of this collection of information, including suggestions for reducing this burden, to Department of Defense, Washington Headquarters Services, Directorate for Information Operations and Reports (0704-0188), 1215 Jefferson Davis Highway, Suite 1204, Arlington, VA 22202-4302. Respondents should be aware that notwithstanding any other provision of law, no person shall be subject to any penalty for failing to comply with a collection of information if it does not display a currently valid OMB control number. **PLEASE DO NOT RETURN YOUR FORM TO THIS ADDRESS**

1. PART OR DRAWING NO. (CAGE) NOMENCLATURE 7500-453 (6N039) BEAM ASSEMBLY, EQUALIZER	2. CODE IDENT 19207	3. SPI NO. AK12084540
4. NATIONAL STOCK NUMBER 2590-01-208-4540	5. DATE OF DRAWING 6/02/2010	6. REVISION B

## 17. NOTES / DRAWING


### Notes:

- 1) ALL DIMENSIONS ARE IN INCHES.
- 2) ALL MATERIAL SIZES ARE NOMINAL UNLESS OTHERWISE SPECIFIED.
- 3) FABRICATE BLOCKING AND BRACING TO THE SIZES INDICATED BELOW AND PLACE AS ILLUSTRATED.
- 4) ALL BLOCKING AND BRACING IS SECURED TO THE INTERIOR OF THE CONTAINER USING NAILS IN ACCORDANCE WITH ASTM-F 1667, SIZE AS REQUIRED.

### BLOCKING AND BRACING SIZES

1. 1" x 8" x 6-3/4" 2 pcs.
2. 2" x 8" x 32" 4 pcs.
3. 1" x 8" x 24" 2 pcs.

### BLOCKING AND BRACING (TOP VIEW)

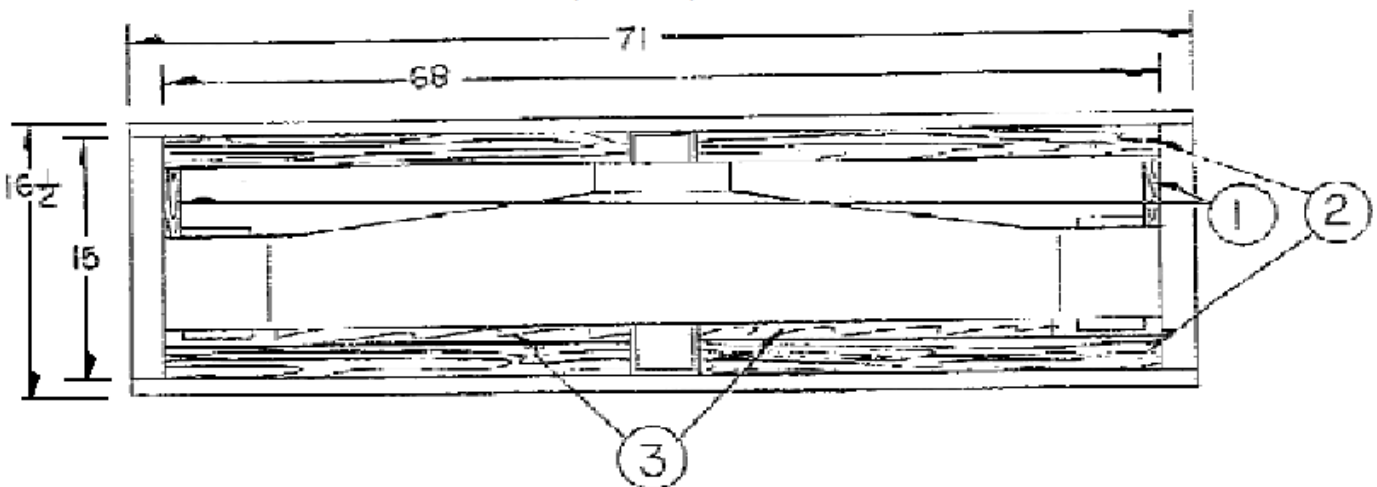

NOTE: ALL BLOCKING IS PLACED INTO THE CONTAINER (ON EDGE).